Revisions			
REV.	DESCRIPTION	DRAWN	APP'D. DATE
1	GENERAL REVISIONS	DLC	03/12/23

Issue Table	
TO	FOR — DATE

DRAWING TITLE:

RDR LS–2 or HS–2 DISPENSER MICON 500 HEAD

PROJECT:

FOR USE WITH PETROVEND CARDLOCKS

RDR
USA. ISSAQUA WASH. 98027
CANADA 5069 BERESFORD ST. BURNABY B.C. V5J 1H8

DRAWN BY:	DLC
DATE DRAWN:	03 03 25
DRAWING SCALE:	NTS
CHECKED BY:	
APPROVED BY:	
CLIENT FILE No.	E03C21D
CAD FILE No.	E03C21D
PLOT SCALE	1:1
PLOT DATE	03 03 25
PLOT PARAMETERS	D_JET
DRAWING NO.	E03C01D
SHEET No.	

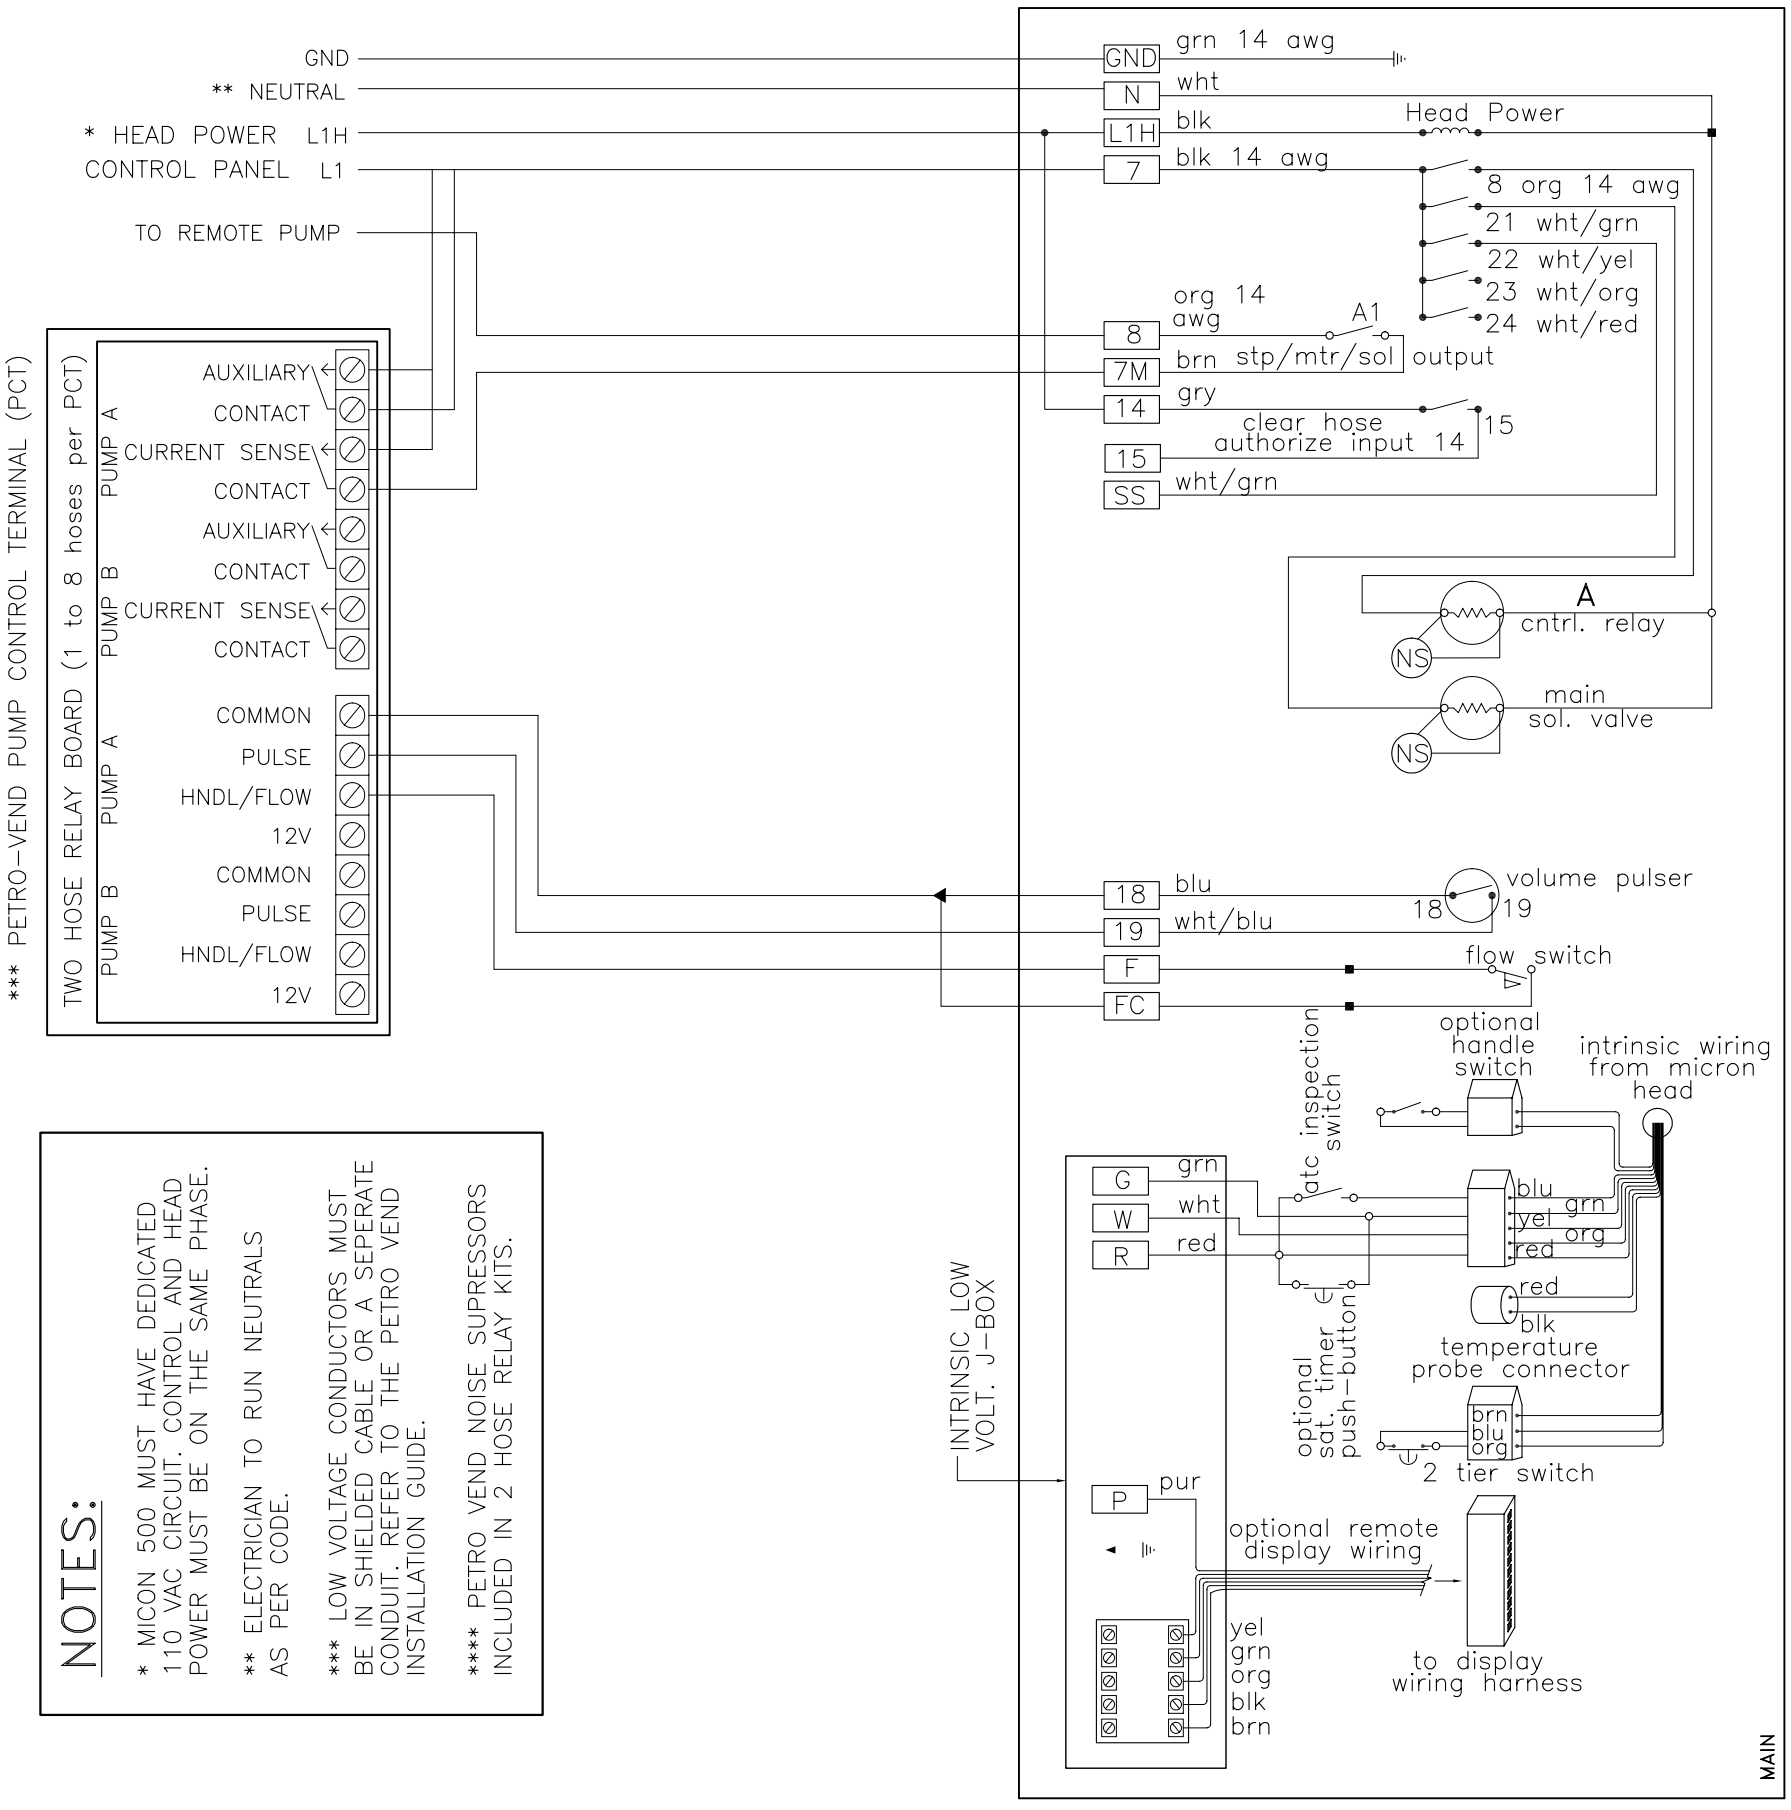

NOTES:

* MICON 500 MUST HAVE DEDICATED 110 VAC CIRCUIT. CONTROL AND HEAD POWER MUST BE ON THE SAME PHASE.

** ELECTRICIAN TO RUN NEUTRALS AS PER CODE.

*** LOW VOLTAGE CONDUCTORS MUST BE IN SHIELDED CABLE OR A SEPERATE CONDUIT. REFER TO THE PETRO VEND INSTALLATION GUIDE.

**** PETRO VEND NOISE SUPRESSORS INCLUDED IN 2 HOSE RELAY KITS.

SYMBOL LEGEND

○	RDR FACTORY TERMINATION
●	MICRON 500 HEAD CONNECTION
▼	FIELD WIRING CONNECTION
□	RDR J–BOX TERMINAL
■	RDR LS OR HS TOP TRAY TERMINAL
⊘	PETROVEND PCT TERMINAL
(NS)	**** PETROVEND NOISE SUPRESSOR